


DPCU/SPCU

Port Connector Union


CBC/CS-Lok

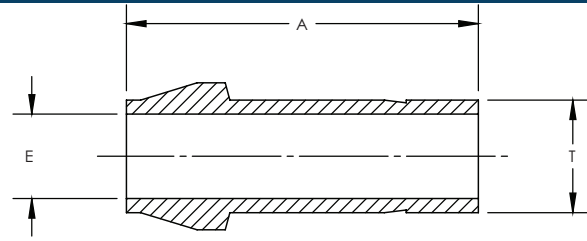

CBC PART NUMBER	INTERCHANGES WITH		CS PART NUMBER	INTERCHANGES WITH		T TUBE O.D.	A	E THRU HOLE
2-DPCU	201-PC	2PC2	2-SPCU	2-2 ZPC		1/8	0.95	0.08
4-DPCU	401-PC	4PC4	4-SPCU	4-4 ZPC		1/4	1.06	0.17
6-DPCU	601-PC	6PC6	6-SPCU	6-6 ZPC		3/8	1.17	0.27
8-DPCU	811-PC	8PC8	8-SPCU	8-8 ZPC		1/2	1.59	0.38
10-DPCU	1011-PC	-	10-SPCU	10-10 ZPC		5/8	1.66	0.47
12-DPCU	1211-PC	12PC12	12-SPCU	12-12 ZPC		3/4	1.66	0.58
16-DPCU	1611-PC	16PC16	16-SPCU	16-16 ZPC		1	2.09	0.80
20-DPCU*	2000-PC	-	-	-		1-1/4	2.72	1.02
24-DPCU*	2400-PC	-	-	-		1-1/2	3.31	1.25

- Note:** Dimensions subject to change, to be used for reference only.
- 1/16", 1/8", and 3/16" adapters come standard without a groove.
 - 1-1/4", 1 1/2", and 2" adapters are furnished with pre-swaged nuts and ferrules.
 - Add "-NF" for pre-swaged nuts and ferrules.
 - Add "-HD" for thick wall adapters with pressures ratings that match max recommended tube.
 - Size 20 & 24 adapters come standard with pre-swaged nuts and ferrules.

METRIC

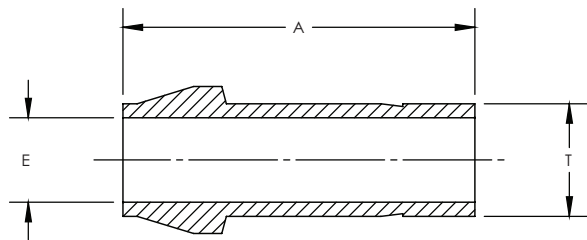

CBC PART NUMBER	INTERCHANGES WITH		T TUBE O.D. (mm.)	A (mm.)	E THRU HOLE (mm.)
6MM-DPCU	6M1-PC	PCM6	6	25.0	4.1
8MM-DPCU	8M1-PC	PCM8	8	26.0	5.6
10MM-DPCU	10M1-PC	PCM10	10	27.1	7.1
12MM-DPCU	12M1-PC	PCM12	12	36.2	8.8

- Note:** Dimensions subject to change, to be used for reference only.