
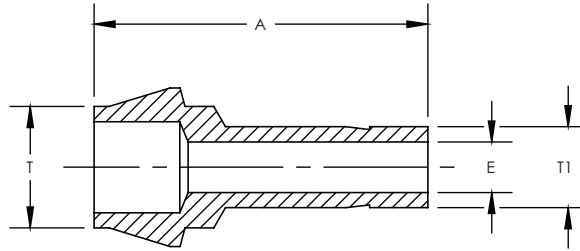


DRPC/SRPC

Reducing Port Connector





CBC PART NUMBER	INTERCHANGES WITH		CS PART NUMBER	INTERCHANGES WITH		T TUBE O.D.	T1 TUBE O.D.	A	E THRU HOLE
4-DRPC-2	401-PC-2	2PC4	4-SRPC-2	2-4 ZPC		1/4	1/8	0.94	0.08
6-DRPC-4	601-PC-4	4PC6	6-SRPC-4	4-6 ZPC		3/8	1/4	1.03	0.17
8-DRPC-4	811-PC-4	4PC8	8-SRPC-4	4-8 ZPC		1/2	1/4	1.23	0.17
8-DRPC-6	811-PC-6	6PC8	8-SRPC-6	6-8 ZPC		1/2	3/8	1.28	0.27
12-DRPC-8	1211-PC-8	8PC12	12-SRPC-8	8-12 ZPC		3/4	1/2	1.53	0.38
16-DRPC-8	1611-PC-8	-	16-SRPC-8	-		1	1/2	1.78	0.38

Note: Dimensions subject to change, to be used for reference only.

- 1/16", 1/8", and 3/16" adapters come standard without a groove.
- 1-1/4", 1-1/2", and 2" adapters are furnished with pre-swaged nuts and ferrules.
- Add "-NF" for pre-swaged nuts and ferrules.
- Add "-HD" for thick wall adapters with pressures ratings that match max recommended tube.

METRIC

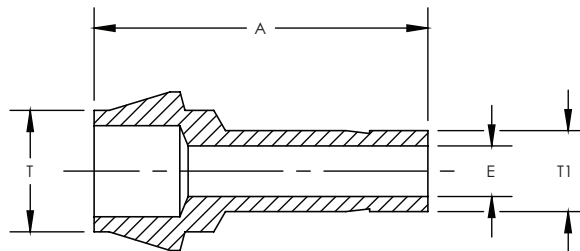

CBC PART NUMBER	INTERCHANGES WITH		T TUBE O.D. (mm.)	T1 TUBE O.D. (mm.)	A (mm.)	E THRU HOLE (mm.)
8MM-DRPC-6MM	8M1-PC-6M	M6PCM8	8	6	25.4	4.1
10MM-DRPC-6MM	10M1-PC-6M	M6PCM10	10	6	25.8	4.1
10MM-DRPC-8MM	10M1-PC-8M	M8PCM10	10	8	26.3	5.6
12MM-DRPC-6MM	12M1-PC-6M	-	12	6	29.6	4.1
12MM-DRPC-8MM	12M1-PC-8M	M8PCM12	12	8	30.1	5.6
12MM-DRPC-10MM	12M1-PC-10M	-	12	10	30.6	7.1

Note: Dimensions subject to change, to be used for reference only.